

Client \_\_\_\_\_ Quantity \_\_\_\_\_  
Project \_\_\_\_\_ Position \_\_\_\_\_

## Pass-Through

Model: J110/2MV1

Cod: J12110200301

Pass-Through refrigerated cabinet for GN2/1 trolleys, 2 doors, one of which is a glass door. Plug-in refrigeration unit, 4 climatic class and R290 ecological refrigerant gas. Led strip lighting, snap handle with lock and key as standard. Temperature range -2°+8°C with ventilated refrigeration hot gas defrost. 75 mm insulation thickness - HFO with high insulation performance and low environmental impact (CFC, HCFC, HFC free); easily replaceable triple chamber magnetic gasket. One-piece structure, interior/exterior AISI 304 stainless steel, exterior galvanised steel back. Rounded inner corners for easy cleaning. Replaceable refrigerant system FSS - Fast Service System - for quick and easy service. Predisposed for connection to Cosmo remote supervision system and ModBus/RTU Rs485 connection.



## Technical data

|                     |                                 |
|---------------------|---------------------------------|
| Gross capacity:     | 838 lt                          |
| Temperature range:  | -2°+8°C                         |
| Refrigerant unit:   | Plug-in                         |
| Climate class:      | 4                               |
| Cooling gas:        | R290 (GWP=3)                    |
| Refrigerant Charge: | 350g                            |
| Defrost:            | Hot gas                         |
| Valve:              | Supplied standard with solenoid |
| Dimensions:         | 810×880×2115 mm                 |
| Packing dimensions: | 840×920×2260 mm                 |
| Voltage:            | 220-240 V - 50 Hz               |
| Cooling capacity:   | 713 W*                          |
| *:                  | Evap. -10°C Cond. +55°C         |

## Features

|                              |                                                                          |
|------------------------------|--------------------------------------------------------------------------|
| Standard equipment:          | LED lighting                                                             |
| Control:                     | Electronic, display flush with the panel                                 |
| Doors:                       | 1 aluminium door, self-closing with 105° latch, right-hand hinges        |
| Door gasket:                 | Magnetic, triple chamber and easily replaceable                          |
| Insulation:                  | 75 mm thickness - CFC/HCFC free                                          |
| Exterior/interior finishing: | Exterior and interior AISI 304 stainless steel. Back in galvanized steel |
| Inner corners:               | Rounded for easy cleaning and ensuring maximum hygiene                   |
| Handle:                      | Snap-in chrome with integrated lock                                      |
| Cosmo:                       | Predisposed for Cosmo Hub connection                                     |

## Accessories and variants

Alimentazione frequenza 60Hz

Trolley GN2/1 20 trays 598x660x1630 mm


Other special voltage

Cosmo cable connection kit

## COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive Wi-Fi technology that allows Coldline, Modular and Nevo appliances to be connected and monitored from a smartphone. The cabinet, connected with Cosmo kit via cable to a Cosmo hub (MODI, VISION, THAW.PRO, LEVTRONIC, QUBI) or with Cosmo Wi-Fi kit, can be monitored by the CosmoApp and receive alerts in case of abnormal operation.

## Technical draw

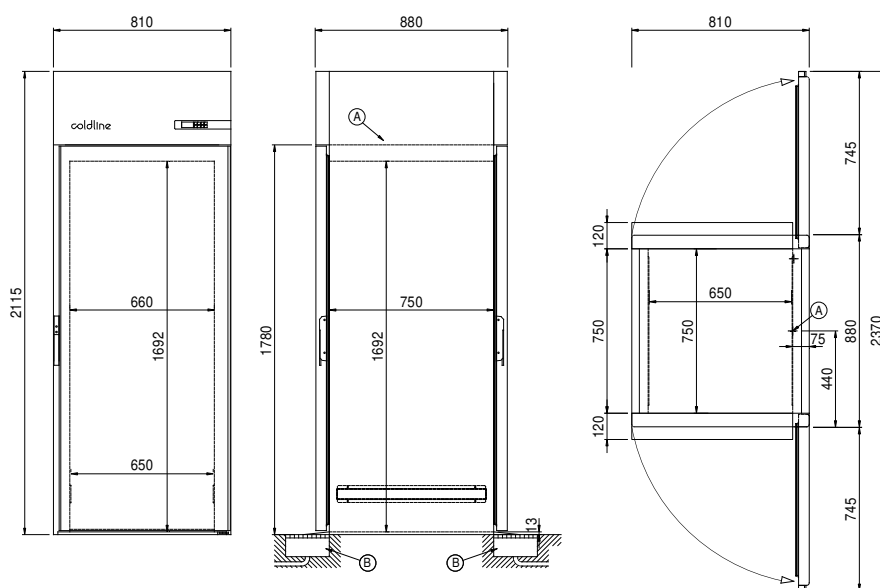

A: Power supply cable outlet

B: Condensation water drain