

| Client | Quantity |
|---------|----------|
| Project | Position |

Storage Vision counter with 2 doors

Model: TCA13/1MJ-760 Cod: T60202000202



Technical data

| Тор: | With top and splashback |
|---------------------|---------------------------------|
| Max capacity: | 14 trays EN60x40 |
| Gross capacity: | 421 lt |
| Temperature range: | -5°+15°C |
| Humidity range: | 90% - 40% |
| Refrigerant unit: | Plug-in |
| Cooling gas: | R290 |
| Defrost: | Hot gas |
| Body height: | 760 mm |
| Valve: | Supplied standard with solenoid |
| Dimensions: | 1450×800×1000 mm |
| Packing dimensions: | 1545×900×998 mm |
| Gross weight: | 166 Kg |
| Voltage: | 220-240 V - 50 Hz |
| Total rate: | 550 W |
| Absorbed Current: | 2,5 A |
| Cooling capacity: | 565 W* |
| *: | Evap10°C Cond. +55°C |

Features

| Functions: | Storage, chocolate, thawing, ice cream |
|------------------------------|--|
| Standard equipment: | 14 slides EN60x40 |
| Control: | 7" touch screen display with USB port |
| Doors: | 2 doors, self-closing, reversible with 105° stop |
| Door gasket: | Magnetic, triple chamber and easily replaceable |
| Insulation: | 60 mm thickness - CFC/HCFC free |
| Exterior/interior finishing: | Exterior and interior AISI 304 stainless steel. |
| Inner corners: | Rounded for easy cleaning and ensuring maximum hygiene |
| Handle: | Stainless steel AISI 304, 2 mm thick |
| Racks and slides: | Stainless steel AISI 304, quick release |
| Feets: | AISI 304 stainless steel adjustable h 100/150 mm |
| Cosmo: | Wi-Fi remote control system |

Vision storage counter 2 doors, counter body height 760 mm, top with splashback. Plug-in refrigeration unit, 5 heavy duty climatic class and R290 ecological refrigerant gas. temperature range -5°+15°C. Adjustable ventilation 50-100% and adjustable humidity 45-95% for the chocolate function. 7" touch screen and operating mode with customisable recipes. Equipment: 14 pairs of guides for $EN60x40\ trays.\ It\ is\ equipped\ with\ the\ functions:\ storage,\ thawing,\ chocolate.$

Anti-corrosion treated evaporator and hot gas defrosting. 60 mm insulation thickness - HFO with high insulation performance and low environmental impact (CFC, HCFC, HFC free). AISI 304 stainless steel handle and magnetic triple

chamber door gasket, easily replaceable. Reversible, self-closing door opening with 105° stop. AISI 304 stainless steel interior/exterior including external back. Rounded inner corners for easy cleaning. The reinforced modular base in $% \left\{ 1,2,...,n\right\}$ colaminated steel allows installation on wheels, feet, mobile or masonry plinths. Cosmo: wi-fi connection for remote monitoring via Cosmo App. When wired to Coldline counters and cabinets acts as a hub for remote monitoring of connected

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.




Accessories and variants

RAL customisable colouring
Aluminium coated backingan EN60x40 h 20 mm
Plug-in water unit
Stainless steel shelf EN60x40
Alimentazione frequenza 60Hz
Plastic coated shelf EN60x40
Other special voltage
Pair of type L slides 402 mm EN
4 Swivel and brake castors h 128 mm
Serial interface, RS485 cable

COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive wi-fi technology that allows VISION storage units to be connected, updated and monitored from smartphones. VISION is also a Cosmo hub and allows remote supervision of the Coldline appliances connected to it. From the CosmoApp you can check the operating conditions of each machine and receive alerts in the event of abnormal operation.

Technical draw

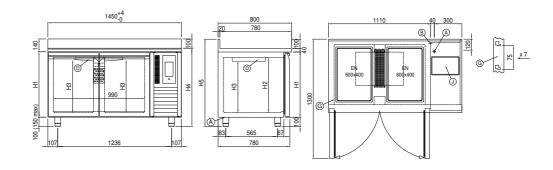

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.