

Client	Quantity	
5	` '	
Project	Position	

# Vision Industry W54LK U

Model: W54LKUR Cod: W80120316002



Vision Industry W54L trolley blast chiller Roll-In U version, temperature range -40°+10°C. It is equipped with the functions: blast chilling, blast freezing, manual cycle. Remote cooling system with R452a refrigerant gas.  $\mathsf{Devote}^{\scriptscriptstyle\mathsf{TM}}$  -  $\mathsf{Dynamic}$  $\label{prop:constraint} \mbox{Evolution Temperature - the innovative system that autonomously recognises the}$ weight, size and temperature of food and automatically shortens the blast chilling or freezing time of hot food without the use of a core probe, 7" touch screen and operating mode with customisable recipes, by time, with core probe or with Devote algorithm. Adjustable ventilation 25-100%. Blast chilling yield +90/+3°C -200 Kg; blast freezing yield  $+90/-18^{\circ}\text{C}$  - 160 Kg. 5 heavy duty climatic class, forced air defrost. 100 mm insulation thickness - HFO with high insulation performance and low environmental impact (CFC, HCFC, HFC free). Electronic expansion valve and anti-corrosion painted evaporator. Compensation valve to reduce waiting times during frequent door openings. Easily replaceable triple chamber magnetic gasket, core probe with screw connector and led lighting. Exterior and interior AISI 304 stainless steel, interior made of "canvas" steel with special highly durable texture. fan unit and condenser cover removable without tools. Blast chiller supplied assembled. ModBus/RTU Rs485 connection as standard. Cosmo: wi-fi connection for remote monitoring via Cosmo App. When wired to Coldline counters and cabinets acts as a hub for remote monitoring of connected equipment.

#### **Technical data**

Max capacity:	1 trolley
Temperature range:	-40°+10°C
Ventilation range:	25% - 100%
Humidifier:	Not available
Refrigerant unit:	remote
Yield +90/+3:	200 Kg
Yield +90/-18:	160 Kg
Cooling gas:	R404/R452
Defrost:	Forced air
Valve:	Electronic expansion valve
Dimensions:	1850×1715×2510 mm
Packing dimensions:	1985×1695×2550 mm
Voltage:	400-415 V - 50-60 Hz
Cooling capacity:	22980 W*
*:	Evap10°C Cond. +45°C

#### **Features**

Blast chilling, shock freezing, continuous cycle
7" touch screen display with USB port
Magnetic, triple chamber and easily replaceable
Needle probe with 1 reading point, quick-release and easily replaceable $ \\$
100 mm thickness - CFC/HCFC free
Internal and external in "linen canvas" steel
Rounded base 20 mm
In AISI 304 stainless steel
Wi-Fi remote control system

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.




## Remote unit technical data

Voltage:	400-415 V 3N - 50 Hz
Cooling gas:	R404-R452a
HP unit:	14
Gross weight:	300 Kg
Dimensions:	1315×870×852 mm
Pipe delivery:	12 mm
Pipe suction:	42 mm
Cooling capacity:	Evap10°C Cond. +45°C

## COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive Wi-Fi technology that allows VISION blast chillers to be connected, updated and monitored from smartphones. VISION is also a Cosmo hub and allows remote supervision of the Coldline appliances connected to it. From the CosmoApp you can check the operating conditions of each machine and receive alerts in the event of abnormal operation.

#### **Technical draw**

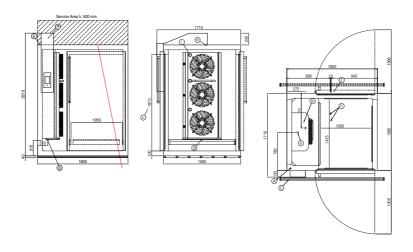

A:	Power supply cable outlet	B:	Condensation water drain	C:	Floor grid for condensate drainage (recommended)
l:	Internal led lighting	L:	Door clear opening dimension	N:	PVC ventilation profiles
R:	Gas output pipes	T:	Pass-through version	W:	Water mains connection for humidifier - 3/4" female. Unloading not required

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previouly or subsequently sold.