

Client \_\_\_\_\_ Quantity \_\_\_\_\_  
Project \_\_\_\_\_ Position \_\_\_\_\_

## Master 1200 cabinet

Model: A120/2NRV

Cod: A14121100701



Master 1200 refrigerated cabinet, 2 glass doors. Remote refrigeration unit, 4 climatic class and R452a refrigerant gas. Equipment: 3 53x53 cm plastic coated shelves, lock with key, led strip lighting. Temperature range 0°+10°C; ventilated refrigeration. Anti-corrosion treated evaporator, off cycle automatic defrost. 75 mm insulation thickness - HFO with high insulation performance and low environmental impact (CFC, HCFC, HFC free). Black plastic handle and magnetic triple chamber door gasket, easily replaceable. Reversible, self-closing door opening with 105° stop. One-piece structure, interior/exterior AISI 304 stainless steel; outside back, external base and inside technical compartment in galvanised/colaminated steel. Rounded inner corners for easy cleaning. The reinforced modular base in colaminated steel allows installation on wheels, feet, mobile or masonry plinths. Replaceable refrigerant system FSS - Fast Service System - for quick and easy service. Predisposed for connection to Cosmo remote supervision system and ModBus/RTU Rs485 connection.

### Technical data

|                     |                                 |
|---------------------|---------------------------------|
| Gross capacity:     | 1155 lt                         |
| Temperature range:  | 0°+10°C                         |
| Refrigerant unit:   | remote                          |
| Cooling gas:        | R452a (GWP=2.141)               |
| Defrost:            | Off cycle automatic             |
| Valve:              | Supplied standard with solenoid |
| Dimensions:         | 1480×715×2085 mm                |
| Packing dimensions: | 1575×930×2144 mm                |
| Voltage:            | 220-240 V - 50-60 Hz            |
| Cooling capacity:   | 668 W*                          |
| *:                  | Evap. -10°C Cond. +55°C         |

### Features

|                              |                                                                                                                                |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| Standard equipment:          | 6 slides for 53x53 cm shelves, 6 plastic coated 53x53 cm shelves, lock with key, LED lighting                                  |
| Control:                     | Electronic, display flush with the panel                                                                                       |
| Doors:                       | 2 doors, self-closing with a 105° stop, right hinged                                                                           |
| Door gasket:                 | Magnetic, triple chamber and easily replaceable                                                                                |
| Insulation:                  | 75 mm thickness - CFC/HCFC free                                                                                                |
| Exterior/interior finishing: | Exterior and interior AISI 304 stainless steel. Back, base and internal technical compartment in galvanized/colaminated steel. |
| Inner corners:               | Rounded for easy cleaning and ensuring maximum hygiene                                                                         |
| Handle:                      | Stainless steel AISI 304, 2 mm thick                                                                                           |
| Racks and slides:            | Stainless steel AISI 304                                                                                                       |
| Feets:                       | AISI 304 stainless steel adjustable h 100/150 mm                                                                               |
| Cosmo:                       | Predisposed for Cosmo Hub connection                                                                                           |

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.

## Accessories and variants

|                                                          |                                                           |
|----------------------------------------------------------|-----------------------------------------------------------|
| Alimentazione frequenza 60Hz                             | 4 Swivel and brake castors h 128 mm                       |
| Other special voltage                                    | Plastic coated shelf 53x53                                |
| Half doors (4 doors)                                     | Pair of type C slides 505 mm                              |
| Frame for fixed masonry plinth                           | Stainless steel drawer, h 150 mm 600/1200                 |
| RAL customisable colouring                               | Bottles shelf, stainless steel coating for shelf 600/1200 |
| Master Marine solutions                                  | Intermediate shelf connection                             |
| Predisposition for connection to CO2 remote control unit | Serial interface, RS485 cable                             |
| Remote condensing unit NEK6210GK                         | Cosmo cable connection kit                                |
| Foot pedal kit                                           | Cosmo wifi connection kit                                 |


## Remote unit technical data

|                     |                         |
|---------------------|-------------------------|
| Voltage:            | 220-240 V - 50 Hz       |
| Cooling gas:        | R452A                   |
| Gross weight:       | 16 Kg                   |
| Dimensions:         | 480×330×295 mm          |
| Pipe delivery:      | Ø 1/4"                  |
| Pipe suction:       | Ø 3/8"                  |
| Packing dimensions: | 540×345×310 mm          |
| Cooling capacity:   | Evap. -10°C Cond. +55°C |

## COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive Wi-Fi technology that allows Coldline, Modular and Nevo appliances to be connected and monitored from a smartphone. The cabinet, connected with Cosmo kit via cable to a Cosmo hub (MODI, VISION, THAW.PRO, LEVTRONIC, QUBI) or with Cosmo Wi-Fi kit, can be monitored by the CosmoApp and receive alerts in case of abnormal operation.

## Technical draw

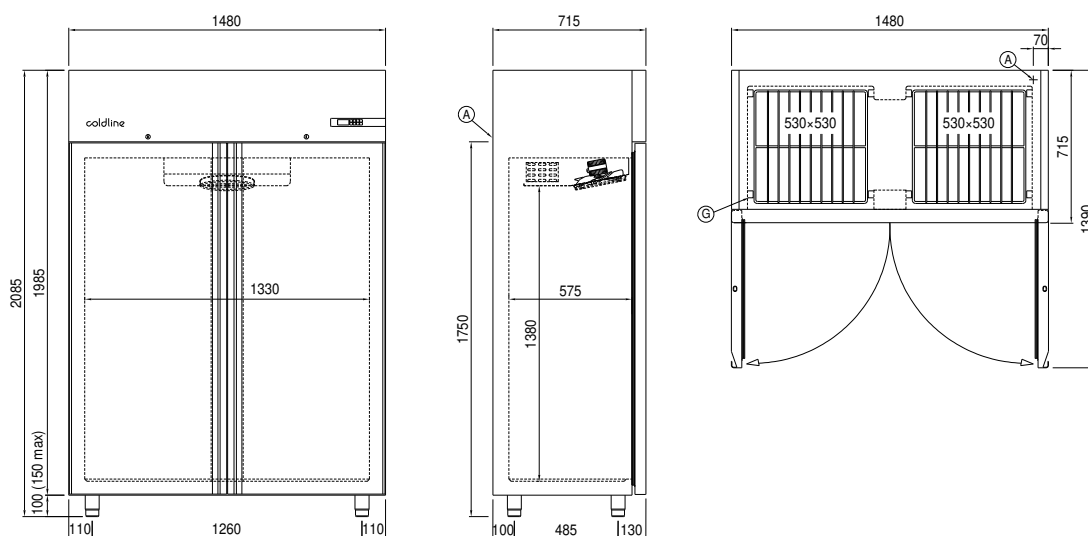

A: Power supply cable outlet

D: Airflow conveyoyr

G: Racks pitch

P: Water drain