coldline

Client _____ Quantity _____

Project _____ Position _____

## Vision F60 cabinet

**Model:** AF60/1TR **Cod:** A64601900101



Vision AF60 retarder prover cabinet, 1 door, temperature range -30°+40°C. It is equipped with the functions: retarded proving, manual proving, continuous cycle, storage, thawing, chocolate, ice cream. Remote refrigeration unit, 5 heavy duty climatic class and R452a refrigerant gas. Electric defrost, adjustable ventilation 25-100% and adjustable humidity 45-95%. Water purification filter. 7" touch screen and operating mode with customisable recipes. Equipment: 20 EN60x80 pairs of slides, led strip lighting, water drain, Electronic expansion valve and anti-corrosion painted evaporator. 75 mm insulation thickness - HFO with high insulation performance and low environmental impact (CFC, HCFC, HFC free). AISI 304 stainless steel handle and magnetic triple chamber door gasket, easily replaceable. Interior/exterior AISI 304 stainless steel; external back, external bottom and internal technical compartment in galvanized/colaminated steel. Cosmo: wi-fi connection for remote monitoring via Cosmo App. When wired to Coldline counters and cabinets acts as a hub for remote monitoring of connected equipment.

### Technical data

| | |
|---|---|
| **Max capacity:** | 33 trays E |
| **Gross capacity:** | 947 lt |
| **Temperature range:** | -30°+40°C |
| **Ventilation range:** | 25% - 100% |
| **Humidity range:** | 45% - 95% with humidifier |
| **Humidifier:** | Including |
| **Refrigerant unit:** | remote |
| **Cooling gas:** | R452a (GWP=2.141) |
| **Defrost:** | Hot gas |
| **Valve:** | Supplied standard with solenoid |
| **Dimensions:** | 810×1096×2215 mm |
| **Packing dimensions:** | 905×1130×2258 mm |
| **Voltage:** | 220-240 V - 50-60 Hz |
| **Cooling capacity:** | 965 W* |
| *: | Evap. -30°C Cond. +55°C |

### Features

| | |
|---|---|
| **Functions:** | Retarder prover, manual proving, continuous cycle, storage, chocolate, thawing, ice cream |
| **Standard equipment:** | 20 slides for EN60x80 trays, LED lighting |
| **Control:** | 7" touch screen display with USB port |
| **Doors:** | 1 door, self-closing with a 105° stop, right hinged |
| **Door gasket:** | Magnetic, triple chamber and easily replaceable |
| **Insulation:** | 75 mm thickness - CFC/HCFC free |
| **Exterior/interior finishing:** | Exterior and interior AISI 304 stainless steel. Back, base and internal technical compartment in galvanized/colaminated steel. |
| **Inner corners:** | Rounded for easy cleaning and ensuring maximum hygiene |
| **Handle:** | In AISI 304 stainless steel |
| **Racks and slides:** | Stainless steel AISI 304 |
| **Feets:** | AISI 304 stainless steel adjustable h 100/150 mm |
| **Cosmo:** | Wi-Fi remote control system |

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.

## Accessories and variants

| | |
|---|---|
| RAL customisable colouring | 4 Swivel and brake castors h 128 mm |
| Alimentazione frequenza 60Hz | Aluminium coated backingan EN60x40 h 20 mm |
| Other special voltage | Stainless steel shelf EN60x40 |
| Remote condensing unit NT2212GK | Plastic coated shelf EN60x40 |
| Purity C Quell ST 50 filter cartridge | Pair of type L slides 755 mm EN60x80 |


## Remote unit technical data

| | |
|---|---|
| **Voltage:** | 220-240 V - 50 Hz |
| **Cooling gas:** | R452A |
| **Gross weight:** | 33 Kg |
| **Dimensions:** | 490×385×345 mm |
| **Pipe delivery:** | Ø 3/8" |
| **Pipe suction:** | Ø 3/8" |
| **Packing dimensions:** | 530×440×380 mm |
| **Cooling capacity:** | Evap. -30°C Cond. +55°C |

## COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive Wi-Fi technology that allows VISION retarder provers to be connected, updated and monitored from smartphones. VISION is also a Cosmo hub and allows remote supervision of the Coldline appliances connected to it. From the CosmoApp you can check the operating conditions of each machine and receive alerts in the event of abnormal operation.

## Technical draw

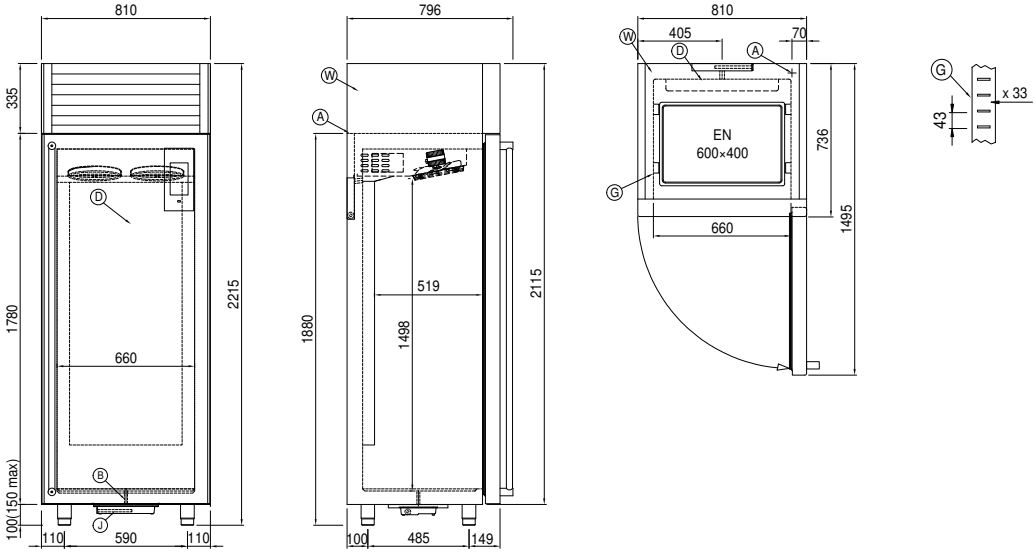


| | | | | | |
|---|---|---|---|---|---|
| **A:** | Power supply cable outlet | **B:** | Condensation water drain | **D:** | Airflow conveyor |
| **G:** | Racks pitch | **J:** | Automatic evaporation of condensing water | **W:** | Water mains connection for humidifier - 3/4” female. Unloading not required |

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.