

Client	Quantity
Project	Position

Master GN counter 2 doors

Model: TP13/1BR-660 Cod: T10211000403



Technical data

Тор:	With top
Gross capacity:	256 lt
Temperature range:	-15°-22°C
Refrigerant unit:	remote
Cooling gas:	R452a (GWP=2.141)
Defrost:	Electric
Body height:	660 mm
Valve:	Supplied standard with solenoid
Dimensions:	1090×700×800 mm
Packing dimensions:	1395×800×998 mm
Voltage:	220-240 V - 50-60 Hz
Cooling capacity:	540 W*
*:	Evap30°C Cond. +55°C

Features

Standard equipment:	2 slides, 2 plastic coated GN1/1 shelves
Control:	Electronic, display flush with the panel
Doors:	2 doors, self-closing, reversible with 105° stop
Door gasket:	Magnetic, triple chamber and easily replaceable
Insulation:	60 mm thickness - CFC/HCFC free
Exterior/interior finishing:	Exterior interior and back in AISI 304 stainless steel. Base in colaminated steel.
Inner corners:	Rounded for easy cleaning and ensuring maximum hygiene
Handle:	Stainless steel AISI 304, 2 mm thick
Racks and slides:	Stainless steel AISI 304
Feets:	AISI 304 stainless steel adjustable h 100/150 mm
Cosmo:	Predisposed for Cosmo Hub connection

Master refrigerated counter 2 doors, counter body height 660 mm, with top. Remote refrigeration unit, 5 heavy duty climatic class and R452a refrigerant gas. Temperature range -15°-22°C with ventilated refrigeration. Equipment: 1 GN1/1 plastic coated shelf. Each compartment can be configured with 1/2+1/2, 1/3+2/3, 1/3+1/3 drawers. Anti-corrosion treated evaporator and electric defrosting. 60 mm insulation thickness - HFO with high insulation performance and low

environmental impact (CFC, HCFC, HFC free). AISI 304 stainless steel handle and magnetic triple chamber door gasket, easily replaceable. Reversible, self-closing door opening with 105° stop. AISI 304 stainless steel interior/exterior including

external back. Rounded inner corners for easy cleaning. The reinforced modular base in colaminated steel allows installation on wheels, feet, mobile or masonry plinths. Replaceable refrigerant system FSS - Fast Service System - for quick and easy service. Prepared for connection to Cosmo - wi-fi remote supervision system

- and ModBus/RTU Rs485 connection.

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.



Accessories and variants

Drawers 1/2		
Drawers 1/3		
Drawers 1/3 + 2/3		
Special counter body heights 650 mm		
Special counter body heights 700 mm		
Special counter body heights 750 mm		
Technical compartment on the left		
Common technical compartment		
Counters without a technical compartment		
Lock with key for drawer 1/2		
Lock with key for drawer 1/3		
Lock with key for drawer 1/3 + 2/3		
LED lighting		
RAL customisable colouring		
Predisposition for connection to CO2 remote control unit		
Alimentazione frequenza 60Hz		
Other special voltage		

Interr	nal hygiene H3
Grani	te flat worktop
Grani	te worktop with splashback
Remo	ote condensing unit NT2178GK
Adjus	stable feet h 145/195 mm
4 Swi	vel and brake castors h 128 mm
Brack	ets for GN pans for drawer
GN1/	2 container + lids kit for drawer, h 150 mm
GN1/	/3 container + lids kit for drawer, h 150 mm
Bottle	es shelf, stainless steel coating for shelf 350
Stainl	less steel shelf GN1/1
Plasti	c coated shelf GN1/1
Pair o	of type C slides 505 mm
Serial	interface, RS485 cable
Cosm	o cable connection kit
Cosm	o wifi connection kit
Remo	ovable plinth GN 2DR h 100 mm


Remote unit technical data

Voltage:	220-240 V - 50 Hz
Cooling gas:	R452A
Gross weight:	25,7 Kg
Dimensions:	500×330×295 mm
Pipe delivery:	Ø 3/8"
Pipe suction:	Ø 3/8"
Packing dimensions:	540×345×310 mm
Cooling capacity:	Evap30°C Cond. +55°C

COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive Wi-Fi technology that allows Coldline, Modular and Nevo appliances to be connected and monitored from a smartphone. The counter, connected with Cosmo kit via cable to a Cosmo hub (MODI, VISION, THAW.PRO, LEVTRONIC, QUBI) or with Cosmo Wi-Fi kit, can be monitored by the CosmoApp and receive alerts in case of abnormal operation.

Technical draw

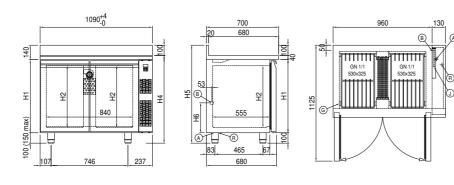

- A: Power supply cable outlet
- B: Condensation water drain
- Racks pitch

- J: Automatic evaporation of condensing water
- R: Gas output pipes

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.