


Client _____ Quantity _____
Project _____ Position _____

Saladette GN counter 4 doors

Model: TS21/1MD-660

Cod: T10400000213

Saladette refrigerated counter 4 doors, counter body height 660 mm, without top. Plug-in refrigeration unit, 5 heavy duty climatic class and R290 ecological refrigerant gas. Temperature range -2°+8°C with ventilated refrigeration. Equipment: 1 GN1/1 plastic coated shelf. Each compartment can be configured with 1/2+1/2, 1/3+2/3, 1/3+1/3+1/3 drawers. Anti-corrosion treated evaporator and electric defrosting. 60 mm insulation thickness - HFO with high insulation performance and low environmental impact (CFC, HCFC, HFC free). AISI 304 stainless steel handle and magnetic triple chamber door gasket, easily replaceable. Reversible, self-closing door opening with 105° stop. AISI 304 stainless steel interior/exterior including external back. Rounded inner corners for easy cleaning. The reinforced modular base in colaminated steel allows installation on wheels, feet, mobile or masonry plinths. Replaceable refrigerant system FSS - Fast Service System - for quick and easy service. Prepared for connection to Cosmo - wi-fi remote supervision system - and ModBus/RTU Rs485 connection.

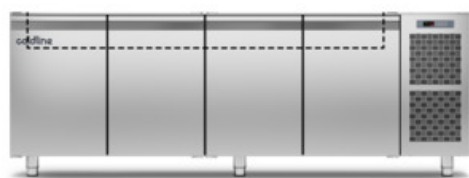

Technical data

Top:	Without top
Gross capacity:	549 lt
Temperature range:	-2°+8°C
Refrigerant unit:	Plug-in
Cooling gas:	R290 (GWP=3)
Refrigerant Charge:	110g
Defrost:	Electric
Body height:	660 mm
Valve:	Supplied standard with solenoid
Dimensions:	2260×655×760 mm
Packing dimensions:	2355×800×998 mm
Voltage:	220-240 V - 50 Hz
Cooling capacity:	406 W*
*:	Evap. -10°C Cond. +55°C

Features

Standard equipment:	4 slides, 4 plastic coated GN1/1 shelves
Control:	Electronic, display flush with the panel
Doors:	4 doors, self-closing, reversible with 105° stop
Door gasket:	Magnetic, triple chamber and easily replaceable
Insulation:	60 mm thickness - CFC/HCFC free
Exterior/interior finishing:	Exterior interior and back in AISI 304 stainless steel. Base in colaminated steel.
Inner corners:	Rounded for easy cleaning and ensuring maximum hygiene
Handle:	Stainless steel AISI 304, 2 mm thick
Racks and slides:	Stainless steel AISI 304
Feets:	AISI 304 stainless steel adjustable h 100/150 mm
Cosmo:	Predisposed for Cosmo Hub connection

Drawers 1/2	Granite flat worktop
Drawers 1/3	Adjustable feet h 145/195 mm
Drawers 1/3 + 2/3	6 Swivel and brake castors h 128 mm
Special counter body heights 650 mm	Brackets for GN pans for drawer
Special counter body heights 700 mm	GN1/2 container + lids kit for drawer, h 150 mm
Special counter body heights 750 mm	GN1/3 container + lids kit for drawer, h 150 mm
Technical compartment on the left	Stainless steel shelf GN1/1
Lock with key for drawer 1/2	Plastic coated shelf GN1/1
Lock with key for drawer 1/3	Pair of type C slides 505 mm
Lock with key for drawer 1/3 + 2/3	Serial interface, RS485 cable
LED lighting	Cosmo cable connection kit
RAL customisable colouring	Cosmo wifi connection kit
Plug-in water unit	IP44 schuko socket with cover
Stainless steel evaporator	Saladette pans kit, 4 doors
Saladette lid, customised dimensions	Saladette lid, standard dimensions 4D
Saladette internal basin, customised dimensions	Saladette internal basin, standard dimensions 4D
Internal hygiene H3	Removable plinth GN 4D h 100 mm
Granite worktop with splashback	Removable plinth GN 4D h 150 mm

Cosmo is The Nice Kitchen's exclusive Wi-Fi technology that allows Coldline, Modular and Nevo appliances to be connected and monitored from a smartphone. The counter, connected with Cosmo kit via cable to a Cosmo hub (MODI, VISION, THAW.PRO, LEVTRONIC, QUBI) or with Cosmo Wi-Fi kit, can be monitored by the CosmoApp and receive alerts in case of abnormal operation.

Technical drawings of the 1000 Series cabinet, showing front, top, and side views with dimensions.

Front View (Left): Shows a cabinet with a total width of 2260⁺⁴₋₀ mm. The width is divided into sections: 70 mm, 1780 mm max, and 410 mm. The height is 1400 mm. The cabinet has four main vertical sections labeled H10, H10, H11, and H10. The bottom section is 1800 mm wide. The bottom rail is 107 mm high. The top rail is 1023 mm high. The right side panel is 107 mm wide. The bottom panel is 100 mm high.

Top View (Middle): Shows the cabinet's footprint. The total width is 700 mm. The width is divided into sections: 20 mm, 680 mm, and 125 mm. The depth is 400 mm. The cabinet has a central section labeled H12 and a bottom section labeled 555 mm. The bottom rail is 83 mm high. The top rail is 465 mm high. The right side panel is 67 mm wide. The bottom panel is 100 mm high.

Side View (Right): Shows the cabinet's side profile. The total width is 1780 mm max. The width is divided into sections: 70 mm, 1780 mm max, and 410 mm. The height is 1125 mm. The cabinet has four main vertical sections labeled GN 1/1 530x325, GN 1/1 530x325, GN 1/1 530x325, and GN 1/1 530x325. The bottom section is 1800 mm wide. The bottom rail is 107 mm high. The top rail is 1023 mm high. The right side panel is 107 mm wide. The bottom panel is 100 mm high.

- | | | | | | |
|----|---|----|--------------------------|----|-------------|
| A: | Power supply cable outlet | B: | Condensation water drain | G: | Racks pitch |
| J: | Automatic evaporation of condensing water | | | | |

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.