

Client	Quantity
Project	Position

Pastry EN60x40 counter 1 door

Model: TP09/1MJR-660 Cod: T20111000203



Technical data

Тор:	With top
Gross capacity:	157 lt
Temperature range:	-2°+8°C
Refrigerant unit:	remote
Cooling gas:	R452a
Defrost:	Electric
Body height:	660 mm
Valve:	Supplied standard with solenoid
Dimensions:	755×800×800 mm
Packing dimensions:	990×900×998 mm
Gross weight:	78 Kg
Voltage:	220-240 V - 50-60 Hz
Total rate:	710 W
Absorbed Current:	3,2 A
Cooling capacity:	368 W*
*:	Evap10°C Cond. +55°C

Features

Standard equipment:	4 slides EN60x40
Control:	Electronic, display flush with the panel
Doors:	1 door, self-closing, reversible with 105° stop
Door gasket:	Magnetic, triple chamber and easily replaceable
Insulation:	60 mm thickness - CFC/HCFC free
Exterior/interior finishing:	Exterior interior and back in AISI 304 stainless steel. Base in colaminated steel.
Inner corners:	Rounded for easy cleaning and ensuring maximum hygiene
Handle:	Stainless steel AISI 304, 2 mm thick
Racks and slides:	Stainless steel AISI 304
Feets:	AISI 304 stainless steel adjustable h 100/150 mm
Cosmo:	Predisposed for Cosmo Hub connection

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.



Accessories and variants

Drawers 1/2
Drawers 1/3
Drawers 1/3 + 2/3
Technical compartment on the left
Common technical compartment
Counters without a technical compartment
Lock with key for drawer 1/2
Lock with key for drawer 1/3
Lock with key for drawer 1/3 + 2/3
RAL customisable colouring
Stainless steel evaporator
Predisposition for connection to CO2 remote control unit
Alimentazione frequenza 60Hz
Other special voltage
Internal hygiene H3

Granite flat worktop		
Granite worktop with splashback		
Remote condensing unit EMT6144GK		
Adjustable feet h 145/195 mm		
4 Swivel and brake castors h 128 mm		
Aluminium coated backingan EN60x40 h 20 mm		
Stainless steel shelf EN60x40		
Plastic coated shelf EN60x40		
Pair of type L slides 605 mm		
R134a valve		
Serial interface, RS485 cable		
Cosmo cable connection kit		
Removable plinth EN 1DR h 50 mm		
Removable plinth EN 1DR h 100 mm		
Removable plinth EN 1DR h 150 mm		


Remote unit technical data

Voltage:	220-240 V - 50 Hz
Cooling gas:	R404-R452
Gross weight:	17 Kg
Dimensions:	450×300×270 mm
Packing dimensions:	470×330×300 mm
Cooling capacity:	Evap10°C Cond. +55°C

COSMO - wi-fi control

Cosmo è la tecnologia wi-fi che permette di connettere e monitorare da smartphone gli apparecchi Coldline. Collega i tavoli Pastry ad un Cosmo hub (MODI, VISION o LEVTRONIC) e dall'app potrai controllare le condizioni di funzionamento di ogni macchina e ricevere alert in caso di funzionamento anomalo.

Technical draw

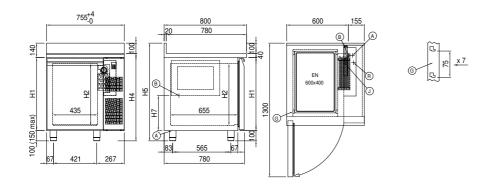

A: Power supply cable outlet

: Condensation water drain

G: Racks pitch

J: Automatic evaporation of condensing water

R: Gas output pipes

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.