

Client \_\_\_\_\_ Quantity \_\_\_\_\_  
Project \_\_\_\_\_ Position \_\_\_\_\_

## Prep-station EN60x40 counter 2 doors

Model: TV13/1MZ-1/6-710 Cod: T20201000231

Prep-Station 800 refrigerated counter 2 doors, counter body height 710 mm, with AISI 304 stainless steel top. Plug-in refrigeration unit, 5 heavy duty climatic class and R290 ecological refrigerant gas. Temperature range -2°+8°C with ventilated refrigeration. Refrigerated container for GN1/6 bowls with opening lid. Equipment: 2 EN60x40 plastic coated shelves. Each compartment can be configured with 1/2+1/2, 1/3+2/3, 1/3+1/3+1/3 drawers. Anti-corrosion treated evaporator and hot gas defrosting. 60 mm insulation thickness - HFO with high insulation performance and low environmental impact (CFC, HCFC, HFC free). AISI 304 stainless steel handle and magnetic triple chamber door gasket, easily replaceable. Reversible, self-closing door opening with 105° stop. AISI 304 stainless steel interior/exterior including external back. Rounded inner corners for easy cleaning. The reinforced modular base in colaminated steel allows installation on wheels, feet, mobile or masonry plinths. Replaceable refrigerant system FSS - Fast Service System - for quick and easy service. Prepared for connection to Cosmo - wi-fi remote supervision system - and ModBus/RTU Rs485 connection.



### Technical data

|                     |                                 |
|---------------------|---------------------------------|
| Top:                | With top                        |
| Gross capacity:     | 389 lt                          |
| Temperature range:  | -2°+8°C                         |
| Refrigerant unit:   | Plug-in                         |
| Cooling gas:        | R290 (GWP=3)                    |
| Refrigerant Charge: | 110g                            |
| Defrost:            | Hot gas                         |
| Body height:        | 710 mm                          |
| Valve:              | Supplied standard with solenoid |
| Dimensions:         | 1450×800×1005 mm                |
| Packing dimensions: | 1545×900×998 mm                 |
| Voltage:            | 220-240 V - 50 Hz               |
| Cooling capacity:   | 406 W*                          |
| *:                  | Evap. -10°C Cond. +55°C         |

### Features

|                              |                                                                                    |
|------------------------------|------------------------------------------------------------------------------------|
| Standard equipment:          | 2 slides, 2 plastic coated EN60x40 shelves                                         |
| Control:                     | Electronic, display flush with the panel                                           |
| Doors:                       | 2 doors, self-closing, reversible with 105° stop                                   |
| Door gasket:                 | Magnetic, triple chamber and easily replaceable                                    |
| Insulation:                  | 60 mm thickness - CFC/HCFC free                                                    |
| Exterior/interior finishing: | Exterior interior and back in AISI 304 stainless steel. Base in colaminated steel. |
| Inner corners:               | Rounded for easy cleaning and ensuring maximum hygiene                             |
| Lid hinges:                  | Made of black plastic                                                              |
| Handle:                      | Stainless steel AISI 304, 2 mm thick                                               |
| Racks and slides:            | Stainless steel AISI 304                                                           |
| Feets:                       | AISI 304 stainless steel adjustable h 100/150 mm                                   |
| Cosmo:                       | Predisposed for Cosmo Hub connection                                               |


## Accessories and variants

|                                       |                                                 |
|---------------------------------------|-------------------------------------------------|
| Drawers 1/2                           | Adjustable feet h 145/195 mm                    |
| Drawers 1/3                           | 4 Swivel and brake castors h 128 mm             |
| Drawers 1/3 + 2/3                     | EN drawer reduction kit for GN containers       |
| Special counter body heights 700 mm   | Brackets for GN pans for drawer                 |
| Special counter body heights 750 mm   | GN1/2 container + lids kit for drawer, h 150 mm |
| Technical compartment on the left     | GN1/3 container + lids kit for drawer, h 150 mm |
| Special size of technical compartment | Stainless steel shelf EN60x40                   |
| Lock with key for drawer 1/2          | Plastic coated shelf EN60x40                    |
| Lock with key for drawer 1/3          | Pair of type L slides 605 mm                    |
| Lock with key for drawer 1/3 + 2/3    | Serial interface, RS485 cable                   |
| LED lighting                          | Cosmo cable connection kit                      |
| RAL customisable colouring            | Cosmo wifi connection kit                       |
| Plug-in water unit                    | IP44 schuko socket with cover                   |
| Alimentazione frequenza 60Hz          | Prep-Station pans kit GN1/6 plug-in, 2D EN      |
| Other special voltage                 | Removable plinth EN 2D h 100 mm                 |

## COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive Wi-Fi technology that allows Coldline, Modular and Nevo appliances to be connected and monitored from a smartphone. The counter, connected with Cosmo kit via cable to a Cosmo hub (MODI, VISION, THAW.PRO, LEVTRONIC, QUBI) or with Cosmo Wi-Fi kit, can be monitored by the CosmoApp and receive alerts in case of abnormal operation.

## Technical draw

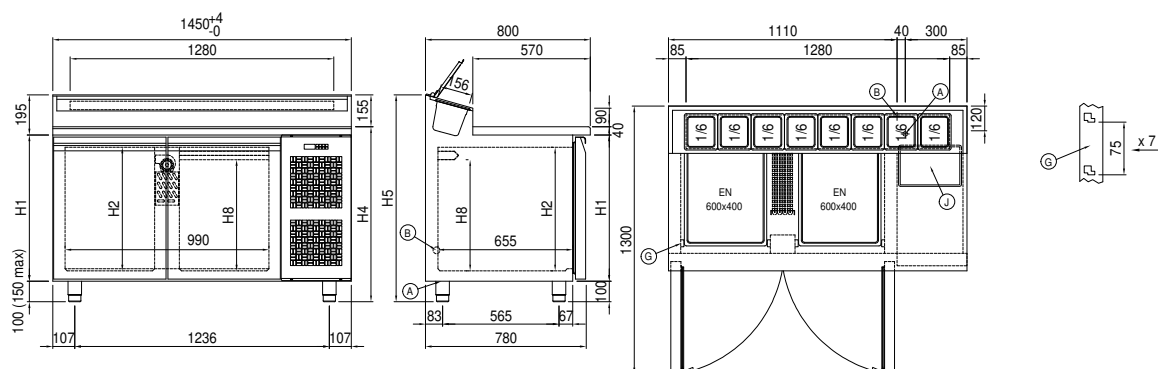

|    |                           |    |                                           |    |                  |
|----|---------------------------|----|-------------------------------------------|----|------------------|
| A: | Power supply cable outlet | B: | Condensation water drain                  | D: | Airflow conveyor |
| G: | Racks pitch               | J: | Automatic evaporation of condensing water | R: | Gas output pipes |