

Client	Quantity
Project	Position

# Vision F Blast Chiller Counter

Model: WTS7FA Cod: W67074010001



temperature range -40°+65°C with humidifier boiler as standard. It is equipped with the functions: blast chilling, blast freezing, manual cycle, thawing, proving, retarded proving, holding, desiccation, chocolate, yoghurt, steam sanitising. Plug-In refrigeration system with water condensation with R452a refrigerant gas. Devote™ - Dynamic Evolution Temperature - the innovative system that autonomously recognises the weight, size and temperature of food and automatically shortens the blast chilling or freezing time of hot food without the  $\,$ use of a core probe. 7" touch screen and operating mode with customisable recipes, by time, with core probe or with Devote algorithm. Adjustable ventilation 25-100%, adjustable humidity 45-95%. Blast chilling yield +90/+3°C - 34 Kg; blast freezing yield +90/-18°C - 24 Kg. 5 heavy duty climatic class, hot gas defrost. 60  $\,$  $\,$  mm insulation thickness - HFO with high insulation performance and low environmental impact (CFC, HCFC, HFC free). Electronic expansion valve and anti-corrosion painted evaporator. Easily replaceable triple chamber magnetic gasket, core probe with screw connector and led lighting. Exterior and interior AISI 304 stainless steel. Equipment: 7 GN1/1-EN60x40 pairs of slides. ModBus/RTU Rs485 connection as standard. Cosmo: wi-fi connection for remote monitoring via Cosmo App. When wired to Coldline counters and cabinets acts as a hub for remote monitoring of connected equipment.

Vision counter multifunction blast chiller 7 trays F version without top,

### **Technical data**

	oven
Max capacity:	11 trays G
Gross capacity:	248 lt
emperature range:	-40°+65°C
entilation range:	25% - 100%
lumidity range:	45% - 95% with humidifier
Humidifier:	Including
Refrigerant unit:	Plug-in water unit
/ield +90/+3:	34 Kg
/ield +90/-18:	24 Kg
Climate class:	5
Cooling gas:	R452a (GWP=2.141)
Defrost:	Hot gas
Body height:	710 mm
/alve:	Electronic expansion valve
Dimensions:	1400×700×810 mm
Packing dimensions:	1545×900×998 mm
/oltage:	220-240 V - 50 Hz
Cooling capacity:	2084 W*
:	Evap10°C Cond. +45°C

#### **Features**

retarder prover, holding, desiccation, chocolate, yoghurt, steam sanitizing, manual cycle  Standard equipment: 7 slides GN1/1, EN60x40  Control: 7" touch screen display with USB port  Door gasket: Magnetic, triple chamber and easily replaceable  Core probe: Needle probe with 1 reading point, quick-release and easily replaceable  Insulation: 60 mm thickness - CFC/HCFC free  Exterior/interior finishing: Exterior and interior AISI 304 stainless steel. Internal and external in "linen canvas" steel  Inner corners: Rounded for easy cleaning and ensuring maximum hygiene  Handle: Stainless steel AISI 304, 2 mm thick  Racks and slides: Stainless steel AISI 304, quick release		
Control: 7" touch screen display with USB port  Door gasket: Magnetic, triple chamber and easily replaceable  Core probe: Needle probe with 1 reading point, quick-release and easily replaceable  Insulation: 60 mm thickness - CFC/HCFC free  Exterior/interior finishing: Exterior and interior AISI 304 stainless steel. Internal and external in "linen canvas" steel  Inner corners: Rounded for easy cleaning and ensuring maximum hygiene  Handle: Stainless steel AISI 304, 2 mm thick  Racks and slides: Stainless steel AISI 304, quick release	Functions:	. , ,
Door gasket: Magnetic, triple chamber and easily replaceable  Core probe: Needle probe with 1 reading point, quick-release and easily replaceable  Insulation: 60 mm thickness - CFC/HCFC free  Exterior/interior finishing: Exterior and interior AISI 304 stainless steel. Internal and external in "linen canvas" steel  Inner corners: Rounded for easy cleaning and ensuring maximum hygiene  Handle: Stainless steel AISI 304, 2 mm thick  Racks and slides: Stainless steel AISI 304, quick release	Standard equipment:	7 slides GN1/1, EN60x40
Core probe:  Needle probe with 1 reading point, quick-release and easily replaceable  Insulation:  60 mm thickness - CFC/HCFC free  Exterior/interior finishing: Exterior and interior AISI 304 stainless steel. Internal and external in "linen canvas" steel  Inner corners: Rounded for easy cleaning and ensuring maximum hygiene  Handle: Stainless steel AISI 304, 2 mm thick  Racks and slides: Stainless steel AISI 304, quick release	Control:	7" touch screen display with USB port
and easily replaceable  Insulation: 60 mm thickness - CFC/HCFC free  Exterior/interior finishing: Exterior and interior AISI 304 stainless steel. Internal and external in "linen canvas" steel  Inner corners: Rounded for easy cleaning and ensuring maximum hygiene  Handle: Stainless steel AISI 304, 2 mm thick  Racks and slides: Stainless steel AISI 304, quick release	Door gasket:	Magnetic, triple chamber and easily replaceable
Exterior/interior finishing:  Exterior and interior AISI 304 stainless steel. Internal and external in "linen canvas" steel  Inner corners:  Rounded for easy cleaning and ensuring maximum hygiene  Handle:  Stainless steel AISI 304, 2 mm thick  Racks and slides:  Stainless steel AISI 304, quick release	Core probe:	
Internal and external in "linen canvas" steel  Inner corners: Rounded for easy cleaning and ensuring maximum hygiene  Handle: Stainless steel AISI 304, 2 mm thick  Racks and slides: Stainless steel AISI 304, quick release	Insulation:	60 mm thickness - CFC/HCFC free
hygiene  Handle: Stainless steel AISI 304, 2 mm thick  Racks and slides: Stainless steel AISI 304, quick release	Exterior/interior finishing:	2,101101 0110 11101101 7 1101 00 1 5101111055 510011
Racks and slides: Stainless steel AISI 304, quick release	Inner corners:	, ,
Table and on a control of the contro	Handle:	Stainless steel AISI 304, 2 mm thick
	Racks and slides:	Stainless steel AISI 304, quick release
Feets: AISI 304 stainless steel adjustable h 100/150 mm	Feets:	AISI 304 stainless steel adjustable h 100/150 mm
Cosmo: Wi. Ei romoto control system	Cosmo:	Wi-Fi remote control system
	003110.	TTT TTT CHIOLOGO SYSTEM

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.



## Accessories and variants

RAL customisable colouring

Sonda al cuore a 3 punti di lettura

Sonda al cuore riscaldata a 1 punto di lettura

Reverse door opening from standard

Alimentazione frequenza 60Hz

Other special voltage

Purity C Quell ST 50 filter cartridge

Lowered foot h 55/70 mm

4 Swivel and brake castors h 128 mm

Stainless steel shelf GN1/1

Plastic coated shelf GN1/1

Stainless steel shelf EN60x40

Plastic coated shelf EN60x40

Pair of type L slides 398 mm GN-EN

Pair of type L slides 398 mm EN

Sanitizing detergent


Touch screen kit for storage device control

Cosmo cable connection kit

# COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive Wi-Fi technology that allows VISION blast chillers to be connected, updated and monitored from smartphones. VISION is also a Cosmo hub and allows remote supervision of the Coldline appliances connected to it. From the CosmoApp you can check the operating conditions of each machine and receive alerts in the event of abnormal operation.

### **Technical draw**

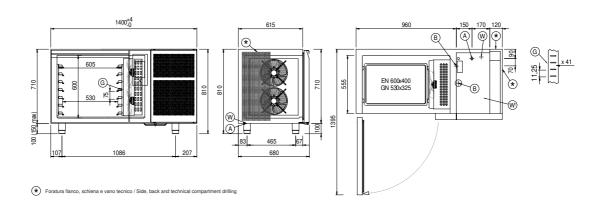

A: Power supply cable outlet B: Condensation water drain G: Racks pitch

Water mains connection for humidifier - 3/4" female. Unloading W: not required

W1: Water inlet/outlet for condensing

unit - 3/4" male

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.