

**Technical data** 

Client	Quantity
Project	Position

# Master GN counter 3 doors

Model: TP17/1MR-660 Cod: T10311000203



Тор:	With top
Gross capacity:	403 lt
Temperature range:	-2°+8°C
Refrigerant unit:	remote
Cooling gas:	R452a (GWP=2.141)
Defrost:	Electric
Body height:	660 mm
Valve:	Supplied standard with solenoid
Dimensions:	1570×700×800 mm
Packing dimensions:	1875×800×998 mm
Voltage:	220-240 V - 50-60 Hz
Cooling capacity:	668 W*
*:	Evap10°C Cond. +55°C

Features			
Standard equipment:	3 slides, 3 plastic coated GN1/1 shelves		
Control:	Electronic, display flush with the panel		
Doors:	3 doors, self-closing, reversible with 105° stop		
Door gasket:	Magnetic, triple chamber and easily replaceable		
Insulation:	60 mm thickness - CFC/HCFC free		
Exterior/interior finishing:	Exterior interior and back in AISI 304 stainless steel. Base in colaminated steel.		
Inner corners:	Rounded for easy cleaning and ensuring maximum hygiene		
Handle:	Stainless steel AISI 304, 2 mm thick		
Racks and slides:	Stainless steel AISI 304		
Feets:	AISI 304 stainless steel adjustable h 100/150 mm		
Cosmo:	Predisposed for Cosmo Hub connection		

Master refrigerated counter 3 doors, counter body height 660 mm, with top. Remote refrigeration unit, 5 heavy duty climatic class and R452a refrigerant gas. Temperature range -2°+8°C with ventilated refrigeration. Equipment: 1 GN1/1 plastic coated shelf. Each compartment can be configured with 1/2+1/2, 1/3+2/3, 1/3+1/3+1/3 drawers. Anti-corrosion treated evaporator and electric defrosting. 60 mm insulation thickness - HFO with high insulation performance and low

environmental impact (CFC, HCFC, HFC free). AISI 304 stainless steel handle and magnetic triple chamber door gasket, easily replaceable. Reversible, self-closing door opening with 105° stop. AISI 304 stainless steel interior/exterior including

external back. Rounded inner corners for easy cleaning. The reinforced modular base in colaminated steel allows installation on wheels, feet, mobile or masonry plinths. Replaceable refrigerant system FSS - Fast Service System - for quick and easy service. Prepared for connection to Cosmo - wi-fi remote supervision system

- and ModBus/RTU Rs485 connection.

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previouly or subsequently sold.



#### Accessories and variants

Drawers 1/2
Drawers 1/3
Drawers 1/3 + 2/3
Special counter body heights 650 mm
Special counter body heights 700 mm
Special counter body heights 750 mm
Technical compartment on the left
Common technical compartment
Counters without a technical compartment
Lock with key for drawer 1/2
Lock with key for drawer 1/3
Lock with key for drawer 1/3 + 2/3
LED lighting
RAL customisable colouring
Stainless steel evaporator
Predisposition for connection to CO2 remote control unit
Alimentazione frequenza 60Hz
Other special voltage

Internal hygiene H3
Granite flat worktop
Granite worktop with splashback
Remote condensing unit NEK6210GK
Adjustable feet h 145/195 mm
4 Swivel and brake castors h 128 mm
Brackets for GN pans for drawer
$\ensuremath{GN1/2}$ container + lids kit for drawer, h 150 mm
$\ensuremath{GN1/3}$ container + lids kit for drawer, h 150 mm
Bottles shelf, stainless steel coating for shelf $350$
Stainless steel shelf GN1/1
Plastic coated shelf GN1/1
Pair of type C slides 505 mm
Serial interface, RS485 cable
Cosmo cable connection kit
Cosmo wifi connection kit
Removable plinth GN 3DR h 100 mm
Removable plinth GN 3DR h 150 mm


### Remote unit technical data

Voltage:	220-240 V - 50 Hz
Cooling gas:	R452A
Gross weight:	16 Kg
Dimensions:	480×330×295 mm
Pipe delivery:	Ø 1/4"
Pipe suction:	Ø 3/8"
Packing dimensions:	540×345×310 mm
Cooling capacity:	Evap10°C Cond. +55°C

# COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive Wi-Fi technology that allows Coldline, Modular and Nevo appliances to be connected and monitored from a smartphone. The counter, connected with Cosmo kit via cable to a Cosmo hub (MODI, VISION, THAW.PRO, LEVTRONIC, QUBI) or with Cosmo Wi-Fi kit, can be monitored by the CosmoApp and receive alerts in case of abnormal operation.

# **Technical draw**

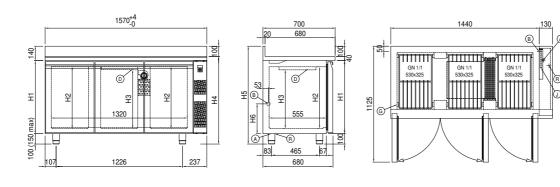

A:	Power supply cable outlet	B:	Condensation water drain	D:	Airflow conveyor

G: Racks pitch J: Automatic evaporation of R: Gas output pipes condensing water

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previouly or subsequently sold.